

SYSTEM COMPONENTS

- AirPocket constructed from type 304 stainless steel
- Alumax 1040 frameless bath enclosure rail system
- AirMax 1.5 HP Whisper Blower
- Timer switch
- Timer relay (T92 DPST 30A 1150 coil or comparable)
- Multi-port PVC air manifold
- 3/4" flexible tubing and clamps
- 3/4" barbed elbows
- 3/4" male adapters
- 2" steel PVC straps

SHIPPING

- The AirPocket is delivered via less than truckload (LTL) freight shipping.
- A loading dock, forklift, or additional assistance is required to unload at the delivery site.
- The AirPocket is crated and can be broken down to offload from the truck manually.

DIMENSIONS

- The rough-in shower door opening for the AirPocket is 78"x30".
- The dimensions will shrink depending on the thickness of the material used to finish the opening. For example, if you use 1/2" slab material plus a waterproofing membrane, the opening dimensions (width and height) will be reduced by approximately 1 1/4".
- A CAD drawing will be provided for your AirPocket and specify the rough opening size for your project.
- An illustration is provided on the next page.

GLASS

- Glass for the door is not included.
- Specifications for the AirPocket and glass door will be provided for your local glass supplier.
- 3/8" low iron glass is recommended.
- Protective glass coating is recommended.

DRAINAGE

- A 1/4" drain pipe is incorporated into the bottom center of the AirPocket.
- Two drain methods; plumb through threshold to connect to shower drain, OR plumb directly into wastewater pipe.




FINISH

- Tile or slab material is used to finish the opening of the AirPocket.
- The finish material also provides a track for the glass door to travel.
- The finished track should be 1/2" wide and 5/8" deep.

ADDITIONAL GUIDELINES

- The AirJet Shower Drying System should be incorporated into the shower space during installation of the AirPocket Door.
- AirMax Whisper Blower can be mounted up to 100 feet from the AirPocket Door.
- It is recommended to place the blower in a conditioned space.
- Timer relay is included for compatibility with custom timers if desired. The relay also allows one timer to run multiple systems.

PRODUCT DIMENSIONS (ALL MEASUREMENTS IN INCHES)

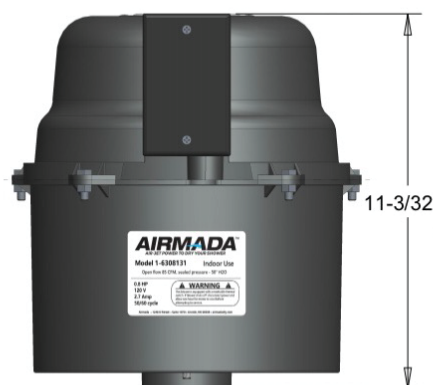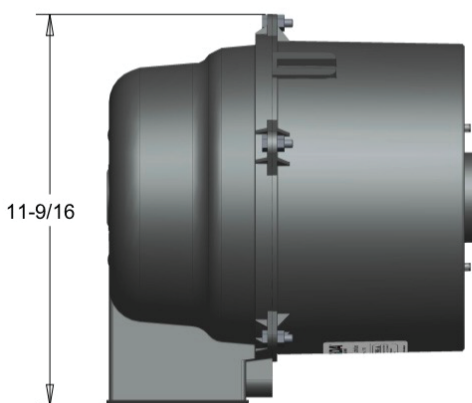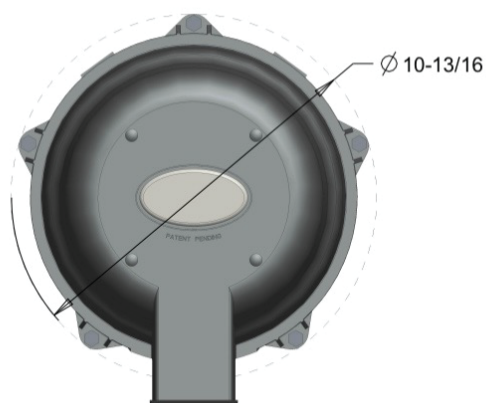

HP	AMPS	VOLTS	AIR FLOW (CFM)	SEALED PREASURE(H2O)
0.8	2.7	110/120	85	50
1.0	5.5	110/120	105	80
1.5	7.3	110/120	115	105
2	9	110/120	115	130

THIS DOCUMENT
CONTAINS INFORMATION
OF A PROPRIETARY
NATURE AND IS THE
PROPERTY OF AIRMADA
DISTRIBUTION OR
REPRODUCTION OF THIS
DOCUMENT (IN WHOLE
OR IN PART) MUST BE
AUTHORIZED BY
AIRMADA
MANAGEMENT

AIRMADA

AIR-JET POWER TO DRY YOUR SHOWER

DIMENSIONS ARE IN INCHES
DO NOT SCALE FROM DRAWING
TOLERANCES ON ANGLES $\pm 1^\circ$
2 PLACE DECIMALS $\pm .015$
3 PLACE DECIMALS $\pm .001$

SCALE: 0.30

AIRMADA-01

DRAWN BY: CK

DATE:08/08/2019

CHECKED BY: M

DATE:08/09/2019

A

SCALE: 0.30

